

1715 Redundant I/O System Specifications


System Module, Catalog Numbers 1715-AENTR, 1715-IB16D, 1715-OB8DE, 1715-IF16, 1715-OF8I

Base Unit, Catalog Numbers 1715-A2A, 1715-A3IO

Termination Assembly, Catalog Numbers 1715-TASIB16D, 1715-TADIB16D, 1715-TASOB8DE, 1715-TADOB8DE, 1715-TASIF16, 1715-TADIF16, 1715-TASOF8, 1715-TADOF8

Accessory, Catalog Numbers 1715-N2S, 1715-N2T, 1715-C2

Topic	Page
Summary of Changes	2
Conformal Coating Standards	3
1715-AENTR EtherNet/IP Adapter and 1715-A2A Module Base	4
1715-IB16D Digital Input Module, 1715-A3IO Module Base, and Termination Assemblies	6
1715-OB8DE Digital Output Module, 1715-A3IO Module Base, and Termination Assemblies	9
1715-IF16 Analog Input Module, 1715-A3IO Module Base, and Termination Assemblies	11
1715-OF8I Analog Output Module, 1715-A3IO Module Base, and Termination Assemblies	14
Additional Resources	17

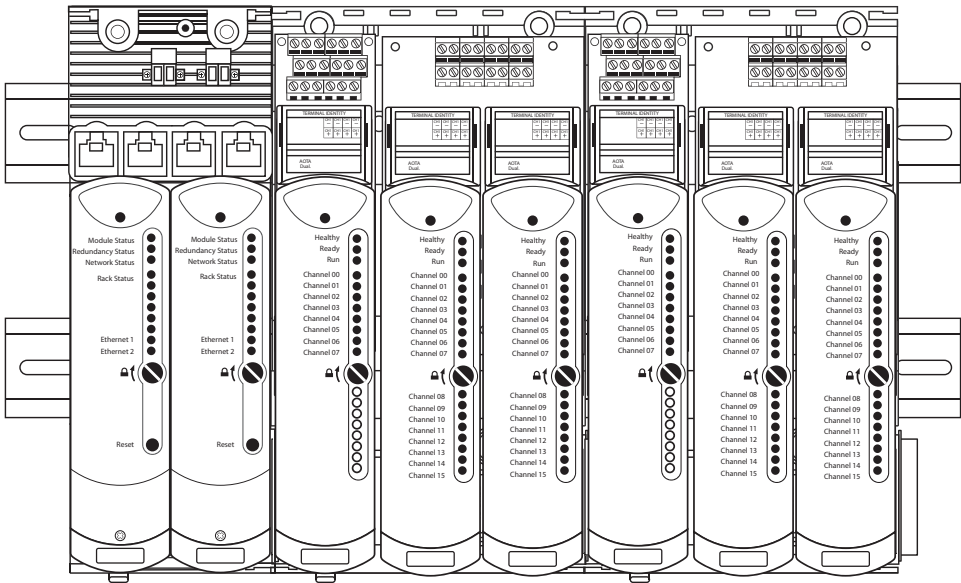

Summary of Changes

This publication contains the following new or updated information. This list includes substantive updates only and is not intended to reflect all changes.

Topic	Page
Updated UKCA certificate number	5, 10, 13, 16

Rockwell Automation recognizes that some of the terms that are currently used in our industry and in this publication are not in alignment with the movement toward inclusive language in technology. We are proactively collaborating with industry peers to find alternatives to such terms and making changes to our products and content. Please excuse the use of such terms in our content while we implement these changes.

Table 1 - 1715 Adapter and Module I/O Base Units

Attribute	1715-A2A	1715-A310
Modules supported	Required for 2 x 1715-AENTR modules Supports: • 1 I/O bus • 8 I/O base units (1715-A310) • 24 I/O modules	As many as 3 I/O modules
Weight, approx	283 g (9.98 oz)	220 g (7.76 oz)
Dimensions (H x W x D), approx	234 x 84 x 30 mm (9.21 x 3.31 x 1.18 in.)	234 x 126 x 18 mm (9.21 x 1.625 x 4.25 in.)

Table 2 - 1715 Termination Assemblies

Attribute	1715-TASIB16D, 1715-TADIB16D	1715-TASOB8DE, 1715-TADOB8DE	1715-TASIF16, 1715-TADIF16	1715-TASOF8, 1715-TADOF8
Modules supported	1715-IB16D	1715-OB8DE	1715-IF16	1715-OF8
Weight, approx	133 g (4.69 oz), 260 g (9.17 oz)	133 g (4.69 oz), 260 g (9.17 oz)	133 g (4.69 oz), 260 g (9.17 oz)	133 g (4.69 oz), 260 g (9.17 oz)
Fuses	50 mA for each channel	5 A for each supply	50 mA per channel	None
Screw torque	0.5 N•m (0.37 lb•ft)			
Screwdriver width	Flathead 0.4 x 2.0 m (0.0156 x 0.0781 in.)			
Dimensions (H x W x D), approx	1715-TASIB16D, 1715-TASOB8DE, 1715-TASIF16, 1715-TASOF8: 132 x 42 mm (5.25 x 1.65 in.) 1715-TADIB16D, 1715-TADOB8DE, 1715-TADIF16, 1715-TADOF8: 132 x 84 mm (5.25 x 3.375 in.)			

Conformal Coating Standards

The 1715 modules are conformally coated and meet the following standards:

- ANSI/ISA-S71.04-2013; Class G1, G2, and G3 environments
- CEI IEC 60654-4:1987; Class 1, 2, and 3 Environments
- UL746E
- MIL-1-46058C to ASTM-G21 (Tropicalization and fungicide)

1715-AENTR EtherNet/IP Adapter and 1715-A2A Module Base

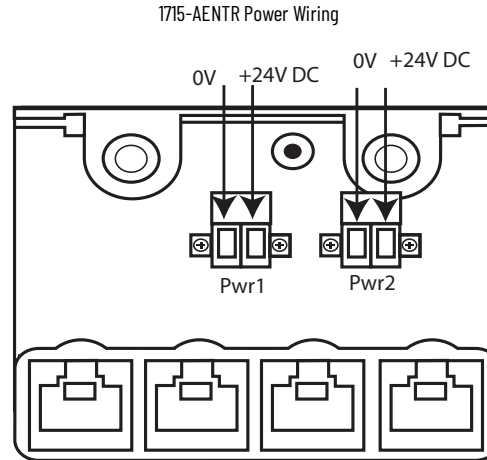
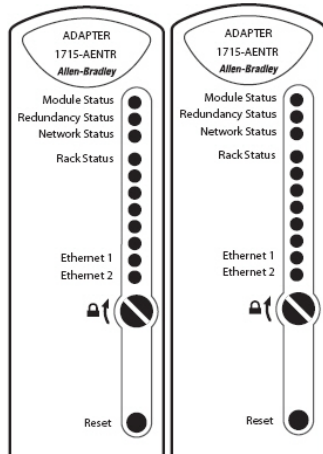


Table 3 - Technical Specifications - 1715-AENTR EtherNet/IP Adapter and 1715-A2A Module Base

Attribute	1715-AENTR and 1715-A2A
Modules supported, max	24 per adapter pair
Operating voltage range, supply power and/or current ratings	1715-AENTR backplane: 380 mA @18...32V DC 1715-A2A input power: 10.4 A total max/400 mA max per slot @ 18...32V DC For fault-tolerant applications, the I/O module power is less than 3.2 A
Power dissipation	8 W max, per adapter
Isolation voltage	50V (continuous), basic insulation type, Ethernet ports to backplane and Ethernet ports to DC power ports No isolation between individual Ethernet ports No isolation between DC power ports Type tested @ 500V AC for 60 s
Base unit	1715-A2A (2-slot adapter base unit)
Weight, approx	1715-AENTR module: 420 g (14.82 oz) 1715-A2A base unit: 283 g (9.98 oz)
Fuse, type	4 A, 125V, Type T
Wiring category	2 - on power ports 2 - on communication ports ⁽¹⁾
Wire size	1715-A2A DC Power connections: single 2.5 mm ² (12 AWG) solid or stranded copper wire rated at 85 °C (185 °F) or greater, 7 mm (9/32 in.) strip length 1715-A2A Ground connection: 4 mm ² (10 AWG) min
Wire type	1715-A2A Ethernet connections: Shielded RJ45 connector according to IEC60603-7, 2-pair or 4-pair shielded Category 5e min cable according to TIA 568-B 1 or shielded Category 5 cable according to ISO/IEC 24702
North American temperature code	T4
IEC temperature code	T4
Enclosure type rating	None (open-style)

(1) Use this conductor category information for planning conductor routing as described in the system level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Table 4 - Environmental Specifications - 1715-AENTR EtherNet/IP Adapter and 1715-A2A Module Base

Attribute	1715-AENTR and 1715-A2A
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock)	-25...60 °C (-13...140 °F)
Temperature, surrounding air max	60 °C (140 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...85 °C (-40...185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Nonoperating Damp Heat)	10...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	2 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	Din rail mount: 25 g Panel mount: 30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	Installed: 30 g Uninstalled: 50 g (with slot fillers)
Emissions CISPR 11 (IEC 61000-6-4)	Class A
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	20V/m with 1 kHz sine-wave 80% AM from 80...1000 MHz 10V/m with 1 kHz sine-wave 80% AM from 1000...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±3 kV at 5 kHz on power ports ±2 kV at 5 kHz on shielded Ethernet ports
Surge transient immunity IEC 61000-4-5	±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports ±2 kV line-earth (CM) on shielded Ethernet ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz

Table 5 - Certifications - 1715-AENTR EtherNet/IP Adapter and 1715-A2A Module Base

Certification ⁽¹⁾	1715-AENTR and 1715-A2A
cULus	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E341697. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E251761.
CE	European Union 2014/30/EC EMC Directive, compliant with: - EN 61326-1; Meas./Control/Lab., Industrial Requirements - EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)
C-Tick	Australian Radiocommunications Act, compliant with: AS/NZS CISPR 11; Industrial Emissions
Ex	European Union Directive 2014/34/EU and UK Statutory Instrument (UKSI) 2016:1107 as amended by UKSI 2019:696, compliant with: - EN 60079-0, Explosive atmospheres – Part 0: Equipment – General requirements - EN 60079-7, Explosive atmospheres – Part 7: Equipment protection by increased safety “e” - ATEX/UKCA certification: Ex ec IIC T4 Gc - ATEX certificate number: 11 ATEX 7928686X - UKCA certificate number: UL22UKEX2512X

Table 5 - Certifications - 1715-AENTR EtherNet/IP Adapter and 1715-A2A Module Base (Continued)

Certification ⁽¹⁾	1715-AENTR and 1715-A2A
IECEX	IECEX Hazardous Location approval, compliant with: - IEC 60079-0, Explosive atmospheres – Part 0: Equipment – General requirements - IEC 60079-7, Explosive atmospheres – Part 7: Equipment protection by increased safety “e” - IECEX certification:  II 3G Ex ec IIC T4 Gc - IECEX certificate number: IECEX UL 15.0032X
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3
EtherNet/IP™	ODVA conformance tested to EtherNet/IP specifications
Functional Safety	TÜV Certified for Functional Safety ⁽²⁾ . Capable of SIL 2 according to EN 62061, IEC 61508, and EN 61326-3-1

(1) When marked. See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

(2) When used with specified firmware revisions.

1715-IB16D Digital Input Module, 1715-A310 Module Base, and Termination Assemblies

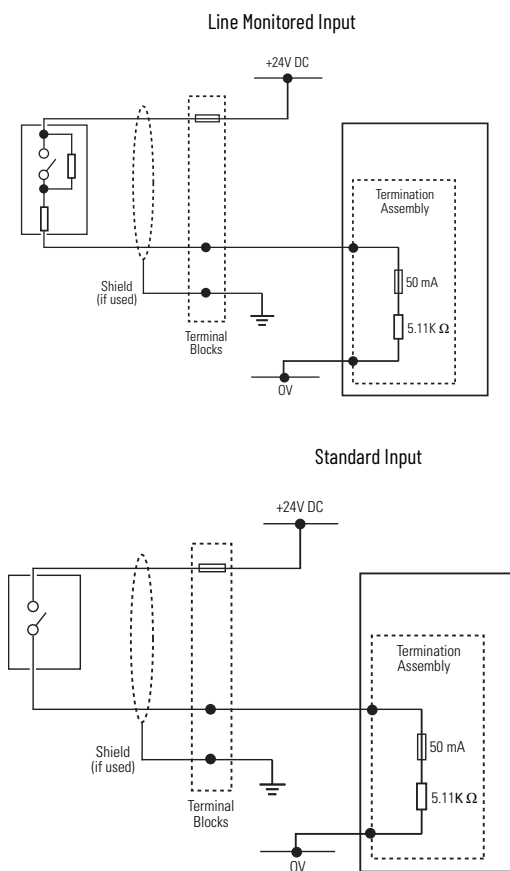
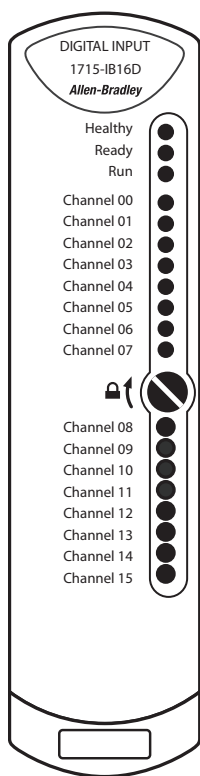


Table 6 - Technical Specifications - 1715-IB16D Digital Input Module, 1715-A310 Module Base, and 1715-TASIB16D, 1715-TADIB16D Termination Assemblies

Attribute	1715-IB16D, 1715-A310, 1715-TASIB16D, 1715-TADIB16D
Operating voltage range, supply power and/or current ratings	1715-IB16D backplane: 260 mA @ 18...32V DC 1715-TASIB16D, 1715-TAD8B16D: 6.5 mA per channel @ 0...32V DC
Slew rate, max	3600 V/s ⁽¹⁾
Translation rate, max	1/(Application scan time + 10 ms) Hz ⁽¹⁾
Power dissipation	System 4.0 W max. Field loop: 0.2 W per field loop max.
Isolation voltage	50V (continuous), basic insulation type, I/O ports to backplane No isolation between individual I/O ports if the 1715-TASIB16D termination assembly is fitted 50V isolation between individual ports if 1715-TADIB16D termination assembly is fitted Type tested at 500V AC for 60 s
Weight, approx	1715-IB16D: 360 g (12.70 oz) I/O base unit: 133 g (5 oz) Termination assembly: 133 g (5 oz), 260 g (10 oz)
Dimensions (H x W x D), approx	166 x 42 x 118 mm (6.5 x 1.625 x 4.625 in.)
Wire size	1715-TASIB16D, 1715-TADIB16D connections: 0.33...1.5 mm ² (22...16 AWG) solid or stranded copper wire rated at 85 °C (185 °F), or greater
Wiring category	2 - on signal ports ⁽²⁾
Fuse, type	50 mA, 125V, Type T
North American temperature code	T4
IEC temperature code	T4
Enclosure type	None (open-style)

(1) The input slew can exceed the specified levels if the duration of the transgression is less than the process safety time of the configured module. Transgression of the slew rate limits identified previously can lead to channel failure that results from diagnostics that are otherwise designed to ensure channels are operating within their defined safety accuracy.

(2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Table 7 - Environmental Specifications - 1715-IB16D Digital Input, 1715-A310 Module Base, and 1715-TASIB16D, 1715-TADIB16D Termination Assemblies

Attribute	1715-IB16D, 1715-A310, 1715-TASIB16D, 1715-TADIB16D
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock)	-25...60 °C (-13...140 °F)
Temperature, surrounding air, max	70 °C (158 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...85 °C (-40...185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Nonoperating Damp Heat)	10...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	2 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	DIN rail mount: 25 g Panel mount: 30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	Installed: 30 g Uninstalled: 50 g (with slot fillers)
Emissions CISPR 11 (IEC 61000-6-4)	Class A
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges

Table 7 - Environmental Specifications - 1715-IB16D Digital Input, 1715-A310 Module Base, and 1715-TASIB16D, 1715-TADIB16D Termination Assemblies

Attribute	1715-IB16D, 1715-A310, 1715-TASIB16D, 1715-TADIB16D
Radiated RF immunity IEC 61000-4-3	20V/m with 1 kHz sine-wave 80% AM from 80...1000 MHz 10V/m with 1 kHz sine-wave 80% AM from 1000...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±2 kV @ 5 kHz on signal ports
Surge transient immunity IEC 61000-4-5	±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz

Certifications - 1715-IB16D Digital Input, 1715-A310 Module Base, and 1715-TASIB16D, 1715-TADIB16D Termination Assemblies

Certification ⁽¹⁾	1715-IB16D, 1715-A310, 1715-TASIB16D, 1715-TADIB16D
cULus	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E341697. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E251761.
CE	European Union 2014/30/EC EMC Directive, compliant with: - EN 61326-1; Meas./Control/Lab., Industrial Requirements - EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)
C-Tick	Australian Radiocommunications Act, compliant with: AS/NZS CISPR 11; Industrial Emissions
Ex	European Union Directive 2014/34/EU and UK Statutory Instrument (UKSI) 2016:1107 as amended by UKSI 2019:696, compliant with: - EN 60079-0, Explosive atmospheres - Part 0: Equipment - General requirements - EN 60079-7, Explosive atmospheres - Part 7: Equipment protection by increased safety "e" - ATEX/UKCA certification: Ex ec IIC T4 Gc - ATEX certificate number: 11 ATEX 7928686X - UKCA certificate number: UL22UKEX2512X
IECEx	IECEx Hazardous Location approval, compliant with: - IEC 60079-0, Explosive atmospheres - Part 0: Equipment - General requirements - IEC 60079-7, Explosive atmospheres - Part 7: Equipment protection by increased safety "e" - IECEx certification:  II 3G Ex ec IIC T4 Gc - IECEx certificate number: IECEx UL 15.0032X
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3
Functional Safety	TÜV Certified for Functional Safety ⁽²⁾ . Capable of SIL 2 according to EN 62061, IEC 61508, and EN 61326-3-1

(1) When marked. See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

(2) When used with specified firmware revisions.

1715-OB8DE Digital Output Module, 1715-A3IO Module Base, and Termination Assemblies

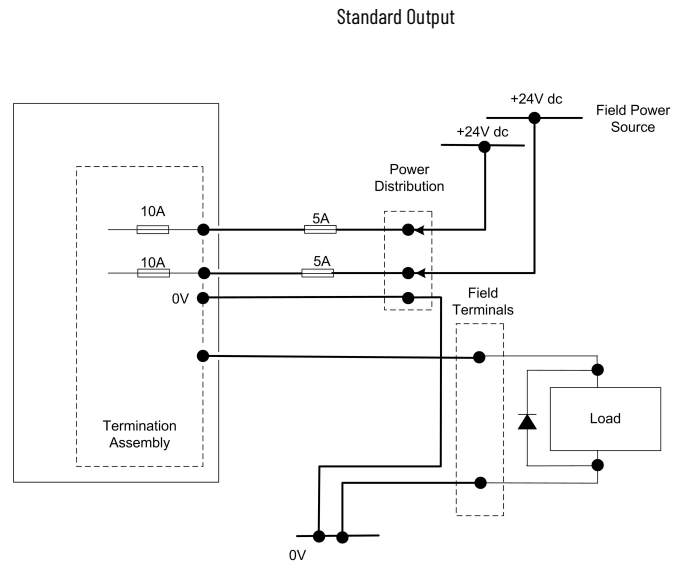
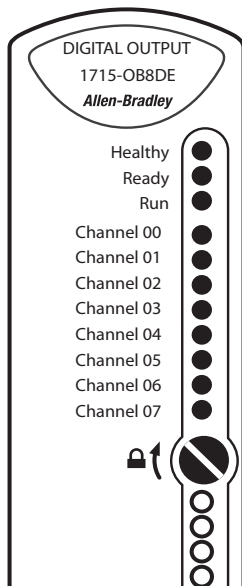


Table 8 - Technical Specifications - 1715-OB8DE Digital Output Module, 1715-A3IO Module Base, and 1715-TASOB8DE, 1715-TADOB8DE Termination Assemblies

Attribute	1715-OB8DE, 1715-A3IO, 1715-TASOB8DE, 1715-TADOB8DE
Operating voltage range, supply power and/or current ratings	1715-OB8DE backplane: 165 mA @ 18...32V DC 1715-TASOB8DE, 1715-TADOB8DE I/O: 0.5 A per channel @ 18...32V DC
Field voltage slew rate, max	150 V/s ⁽¹⁾ (2)
De-energized output voltage slew rate, max	12 V/ms ⁽³⁾
Energized output current slew rate, max	0.9 A/ms ⁽³⁾
Power dissipation	System: 3.0 W max Field Loop: 0.17 W per field loop
Isolation voltage	50V (continuous), basic insulation type, I/O ports to backplane No isolation between individual I/O ports Type tested at 500V AC for 60 s
Weight, approx	1715-OB8DE module: 290 g (10.23 oz) I/O base unit: 133 g (5 oz) Termination assembly: 133 g (5 oz), 260 g (10 oz)
Dimensions (H x W x D), approx	166 x 42 x 118 mm (6.5 x 1.625 x 4.625 in.)
Wire size	1715-TASOB8DE, 1715-TADOB8DE connections: Single 0.75...1.5 mm ² (18...16 AWG) solid or stranded copper wire rated at 85 °C (185 °F), or greater
Wiring category	2 - on signal ports ⁽⁴⁾
Fuse, type	1715-TASOB8DE, 1715-TADOB8DE I/O: 10 A, 125V, Type F 1715-TASOB8DE, 1715-TADOB8DE I/O Power Source: 5 A max, 32V DC, min
Pilot duty rating	16VA, 1.5 inrush
North American temperature code	T4
IEC temperature code	T4
Enclosure type	None (open-style)

- (1) Limit not applicable if all outputs are energized.
(2) Limit not applicable if perturbations are less than 2.0 V_{pp} or last less than 3 minutes in any 60 minute period.
(3) Limit not applicable to transgressions that last less than the process safety time configured for the module. Transgression of the slew rate limits identified previously can lead to channel failure that results from diagnostics that are otherwise designed to ensure channels are operating within their defined safety accuracy.
(4) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Table 9 - Environmental Specifications - 1715-OB8DE Digital Output Module, 1715-A310 Module Base, and 1715-TASOB8DE, 1715-TASOB8DE Termination Assemblies

Attribute	1715-OB8DE, 1715-A310, 1715-TASOB8DE, 1715-TADOB8DE
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock)	-25...60 °C (-13...140 °F)
Temperature, surrounding air, max	70 °C (158 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...85 °C (-40...185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Nonoperating Damp Heat)	10...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	2 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	DIN rail mount: 25 g Panel mount: 30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	Installed: 30 g Uninstalled: 50 g (with slot fillers)
Emissions CISPR 11 (IEC 61000-6-4)	Class A
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	20V/m with 1 kHz sine-wave 80% AM from 80...1000 MHz 10V/m with 1 kHz sine-wave 80% AM from 1000...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±2 kV @ 5 kHz on signal ports
Surge transient immunity IEC 61000-4-5	±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz

Table 10 - Certifications - 1715-OB8DE Digital Output Module, 1715-A310 Module Base, and 1715-TASOB8DE, 1715-TASOB8DE Termination Assemblies

Certification ⁽¹⁾	1715-OB8DE, 1715-A310, 1715-TASOB8DE, 1715-TADOB8DE
cULus	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E341697. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E251761.
CE	European Union 2014/30/EC EMC Directive, compliant with: - EN 61326-1; Meas./Control/Lab., Industrial Requirements - EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)
C-Tick	Australian Radiocommunications Act, compliant with: AS/NZS CISPR 11; Industrial Emissions
Ex	European Union Directive 2014/34/EU and UK Statutory Instrument (UKSI) 2016:1107 as amended by UKSI 2019:696, compliant with: - EN 60079-0, Explosive atmospheres - Part 0: Equipment - General requirements - EN 60079-7, Explosive atmospheres - Part 7: Equipment protection by increased safety "e" - ATEX/UKCA certification: Ex ec IIC T4 Gc - ATEX certificate number: 11 ATEX 7928686X - UKCA certificate number: UL22UKEX2512X


Table 10 - Certifications - 1715-OB8DE Digital Output Module, 1715-A310 Module Base, and 1715-TASOB8DE, 1715-TASOB8DE Termination Assemblies

IECEX	IECEX Hazardous Location approval, compliant with: - IEC 60079-0, Explosive atmospheres – Part 0: Equipment – General requirements - IEC 60079-7, Explosive atmospheres – Part 7: Equipment protection by increased safety “e” - IECEX certification: II 3G Ex ec IIC T4 Gc - IECEX certificate number: IECEX UL 15.0032X
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3
Functional Safety	TÜV Certified for Functional Safety⁽²⁾; Capable of SIL 2 according to EN 62061, IEC 61508, and EN 61326-3-1

(1) When marked. See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

(2) When used with specified firmware revisions.

1715-IF16 Analog Input Module, 1715-A310 Module Base, and Termination Assemblies

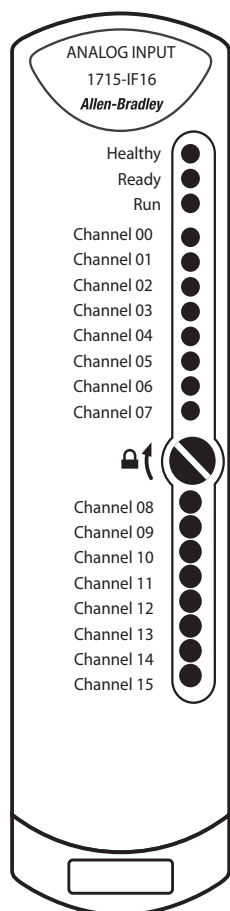

32091-M

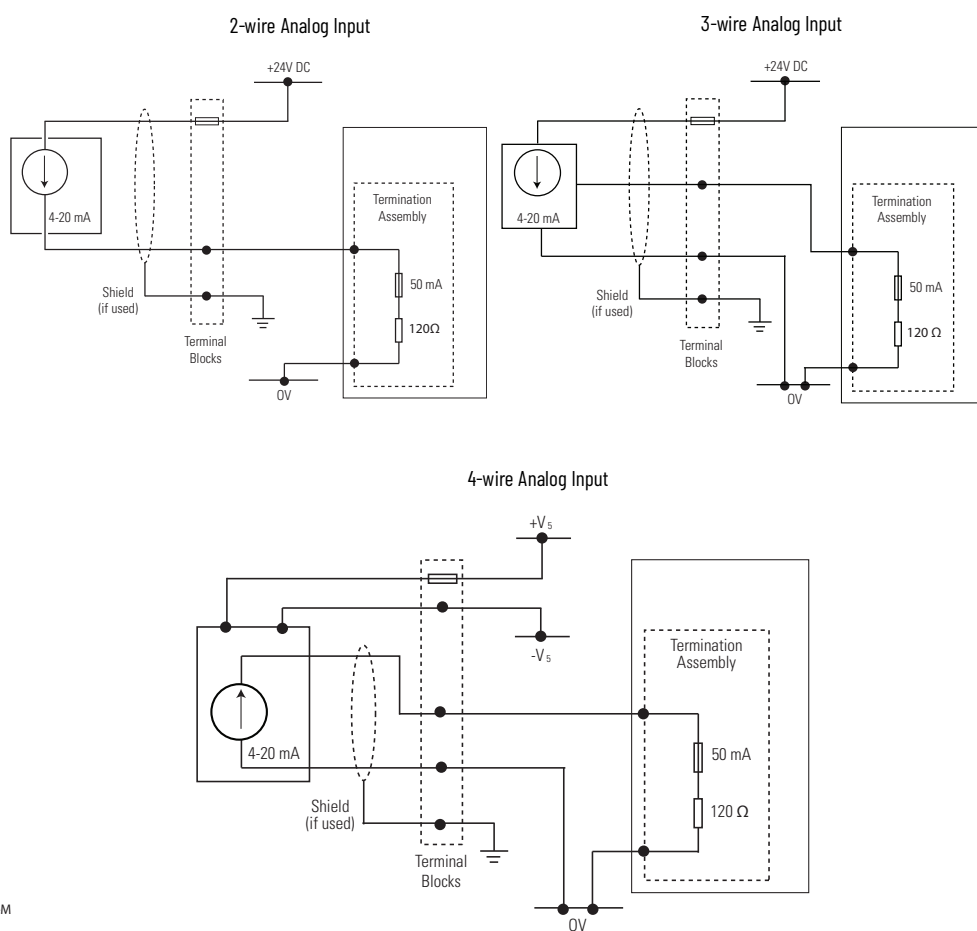


Table 11 - Performance Criteria for 1715-IF16 Analog Input Module

Attribute	Value
Data Input value least significant bit	0.98 μ A
Channel Measurement Error at 25 °C (77 °F) $\pm$ 2 °C ($\pm$ 3.6 °F)	
After 1 year at 40 °C (104 °F)	0.21% + 10 μ A
After 2 years at 40 °C (104 °F)	0.22% + 10 μ A
After 5 years at 40 °C (104 °F)	0.23% + 10 μ A
Temperature Drift	(0.01% + 0.3 μ A) per °C

Technical Specifications - 1715-IF16 Analog Input Module, 1715-A310 Module Base, and 1715-TASIF16, 1715-TADIF16 Termination Assemblies

Attribute	1715-IF16, 1715-A310, 1715-TASIF16, 1715-TADIF16
Operating voltage range, supply power and/or current ratings	1715-IF16 backplane: 260 mA @ 18...32V DC 1715-TASIF16, 1715-TADIF16 I/O: 0...24 mA per channel @ 18...32V DC
Slew rate, max	700 mA/s ⁽¹⁾
Power dissipation	System 4.0 W max. Field loop: 0.075 W per field loop max.
Isolation voltage	50V (continuous), basic insulation type, I/O ports to backplane No isolation between individual I/O ports if the 1715-TASIF16 termination assembly is fitted 50V isolation between individual ports if 1715-TADIF16 termination assembly is fitted Type tested at 500V AC for 60 s
Input resolution	0.0039 mA/cnt (12 bits over 4...20 mA range)
Weight, approx	1715-IF16 module: 360 g (12.70 oz) I/O base unit: 133 g (5 oz) Termination assembly: 133 g (5 oz), 260 g (10 oz)
Dimensions (H x W x D), approx	166 x 42 x 118 mm (6.5 x 1.625 x 4.625 in.)
Wire size	1715-TASIF16, 1715-TADIF16 I/O connections: Single 0.33...1.5 mm ² (22...16 AWG) solid or stranded shielded copper wire rated at 85 °C (185 °F), or greater
Wiring category	2 - on shielded signal ports ⁽²⁾
Fuse, type	1715-TASIF16, 1715-TADIF16 I/O: 50 mA, 125V, Type T
Wire type	Shielded
North American temperature code	T4
IEC temperature code	T4
Enclosure type	None (open-style)

- (1) The input slew can exceed the specified level if the duration of the transgression is less than the process safety time of the configured module. Transgression of the slew rate limits identified previously can lead to channel failure that results from diagnostics that are otherwise designed to ensure channels are operating within their defined safety accuracy.
- (2) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Table 12 - Environmental Specifications - 1715-IF16 Analog Input Module, 1715-A310 Module Base, and 1715-TASIF16, 1715-TADIF16 Termination Assemblies

Attribute	1715-IF16, 1715-A310, 1715-TASIF16, 1715-TADIF16
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock)	-25...60 °C (-13...140 °F)
Temperature, surrounding air, max	70 °C (158 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...85 °C (-40...185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Nonoperating Damp Heat)	10...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	2 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	DIN rail mount: 25 g Panel mount: 30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	Installed: 30 g Uninstalled: 50 g (with slot fillers)
Emissions CISPR 11 (IEC 61000-6-4)	Class A

Table 12 - Environmental Specifications - 1715-IF16 Analog Input Module, 1715-A310 Module Base, and 1715-TASIF16, 1715-TADIF16 Termination Assemblies

Attribute	1715-IF16, 1715-A310, 1715-TASIF16, 1715-TADIF16
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	20V/m with 1 kHz sine-wave 80% AM from 80...1000 MHz 10V/m with 1 kHz sine-wave 80% AM from 1000...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±2 kV @ 5 kHz on shielded signal ports
Surge transient immunity IEC 61000-4-5	±2 kV line-earth (CM) on shielded signal ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz

Table 13 - Certifications - 1715-IF16 Analog Input Module, 1715-A310 Module Base, and 1715-TASIF16, 1715-TADIF16 Termination Assemblies

Certification ⁽¹⁾	1715-IF16, 1715-A310, 1715-TASIF16, 1715-TADIF16
cULus UL	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E341697. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E251761.
CE	European Union 2014/30/EC EMC Directive, compliant with: - EN 61326-1; Meas./Control/Lab., Industrial Requirements - EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)
C-Tick	Australian Radiocommunications Act, compliant with: AS/NZS CISPR 11; Industrial Emissions
Ex	European Union Directive 2014/34/EU and UK Statutory Instrument (UKSI) 2016:1107 as amended by UKSI 2019:696, compliant with: - EN 60079-0, Explosive atmospheres - Part 0: Equipment - General requirements - EN 60079-7, Explosive atmospheres - Part 7: Equipment protection by increased safety "e" - ATEX/UKCA certification: Ex ec IIC T4 Gc - ATEX certificate number: 11 ATEX 7928686X - UKCA certificate number: UL22UKEX2512X
IECEx	IECEx Hazardous Location approval, compliant with: - IEC 60079-0, Explosive atmospheres - Part 0: Equipment - General requirements - IEC 60079-7, Explosive atmospheres - Part 7: Equipment protection by increased safety "e" - IECEx certification:  II 3G Ex ec IIC T4 Gc - IECEx certificate number: IECEx UL 15.0032X
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3
Functional Safety	TÜV Certified for Functional Safety ⁽²⁾ . Capable of SIL 2 according to EN 62061, IEC 61508, and EN 61326-3-1

(1) When marked. See the Product Certification link at [rokauto/certifications](https://www.rockwellautomation.com/rokauto/certifications) for Declarations of Conformity, Certificates, and other certification details.

(2) When used with specified firmware revisions.

1715-OF8I Analog Output Module, 1715-A3I0 Module Base, and Termination Assemblies

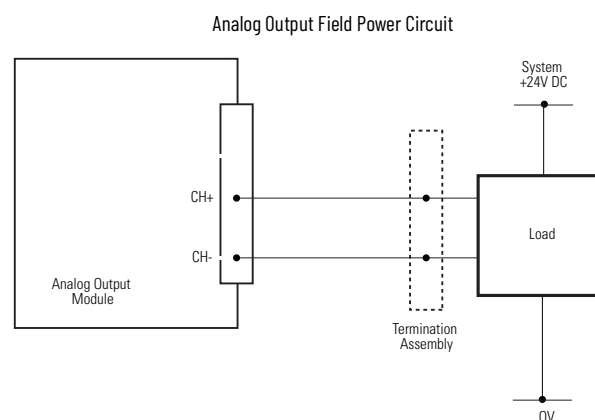
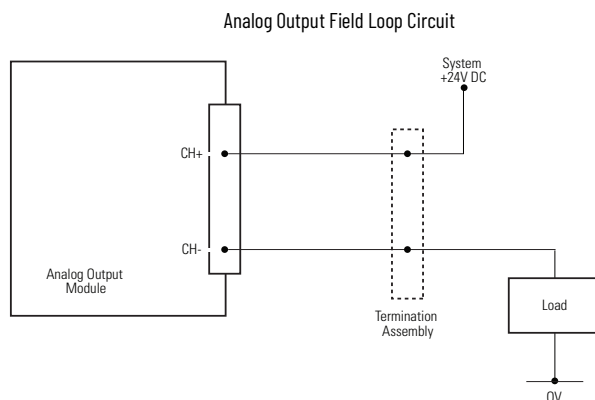
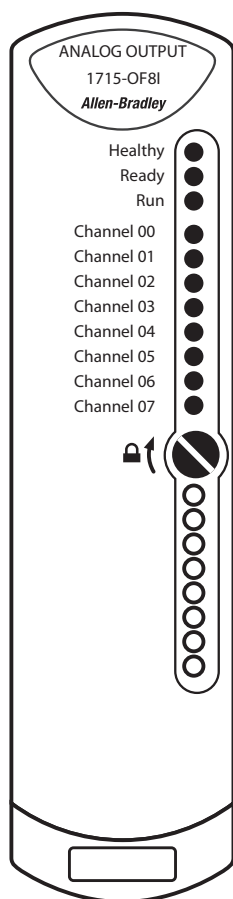


Table 14 - Performance Criteria for 1715-OF8I Analog Output Module

Attribute	Value
Data Input value least significant bit (control)	0.98 μ A
Data Output value least significant bit (monitor)	3.9 μ A
Channel Measurement Error at 25 °C (77 °F) $\pm$ 2 °C ($\pm$ 3.6 °F)	
After 1 year at 40 °C (104 °F)	0.30% + 10 μ A
After 2 years at 40 °C (104 °F)	0.35% + 10 μ A
After 5 years at 40 °C (104 °F)	0.44% + 10 μ A
Temperature drift	(0.01% + 0.1 μ A) per °C

Table 15 - Technical Specifications - 1715-OF8I Analog Output Module, 1715-A3I0 Module Base, and 1715-TASOF8I, 1715-TADOF8I Termination Assemblies

Attribute	1756-OF8I, 1715-A3I0, 1715-TASOF8I, 1715-TADOF8I
Operating voltage range, supply power and/or current ratings	1715-OF8I backplane: 260 mA @ 18...32V DC 1715-TASOF8I, 1715-TADOF8I I/O: 0...24 mA per channel @ 18...32V DC
Compliance voltage slew rate, max	No limit identified within compliance voltage range
Power dissipation	System: 3.6 W max Field Loop: 0.64 W per field loop
Isolation voltage	50V (continuous), basic insulation type, I/O ports to backplane 50V isolation between individual I/O ports Type tested at 500V AC for 60 s
Weight, approx	1715-OF8I module: 340 g (11.99 oz) I/O base unit: 133 g (5 oz) Termination assembly: 133 g (5 oz), 260 g (10 oz)

Table 15 - Technical Specifications - 1715-OF8I Analog Output Module, 1715-A310 Module Base, and 1715-TASOF8I, 1715-TADOF8I Termination Assemblies

Attribute	1756-OF8I, 1715-A310, 1715-TASOF8, 1715-TADOF8
Dimensions (H x W x D), approx	166 x 42 x 118 mm (6.5 x 1.625 x 4.625 in.)
Wire size	1715-TASOF8I, 1715-TADOF8I I/O connections: Single 0.33...1.5 mm ² (22...16 AWG) solid or stranded shielded copper wire rated at 85 °C (185 °F), or greater
Wiring category	2 - on shielded signal ports ⁽¹⁾
Wire type	Shielded
North American temperature code	T4
IEC temperature code	T4
Enclosure type	None (open-style)

(1) Use this conductor category information for planning conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Table 16 - Environmental Specifications -1715-OF8I Analog Output Module, 1715-A310 Module Base, and 1715-TASOF8, 1715-TADOF8 Termination Assemblies

Attribute	1756-OF8I, 1715-A310, 1715-TASOF8, 1715-TADOF8
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock)	-25...60 °C (-13...140 °F)
Temperature, surrounding air, max	70 °C (158 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...85 °C (-40...185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Nonoperating Damp Heat)	10...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	2 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	DIN rail mount: 25 g Panel mount: 30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	Installed: 30 g Uninstalled: 50 g (with slot fillers)
Emissions CISPR 11 (IEC 61000-6-4)	Class A
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	20V/m with 1 kHz sine-wave 80% AM from 80...1000 MHz 10V/m with 1 kHz sine-wave 80% AM from 1000...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine-wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±2 kV @ 5 kHz on shielded signal ports
Surge transient immunity IEC 61000-4-5	±2 kV line-earth (CM) on shielded signal ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine-wave 80% AM from 150 kHz...80 MHz

Table 17 - Certifications - 1715-OF8I Analog Output Module, 1715-A310 Module Base, and 1715-TASOF8, 1715-TADOF8 Termination Assemblies

Certification ⁽¹⁾	1756-OF8I, 1715-A310, 1715-TASOF8, 1715-TADOF8
cULus	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E341697. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E251761.
CE	European Union 2014/30/EC EMC Directive, compliant with: - EN 61326-1; Meas./Control/Lab., Industrial Requirements - EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)
C-Tick	Australian Radiocommunications Act, compliant with: AS/NZS CISPR 11; Industrial Emissions
Ex	European Union Directive 2014/34/EU and UK Statutory Instrument (UKSI) 2016:1107 as amended by UKSI 2019:696, compliant with: - EN 60079-0, Explosive atmospheres - Part 0: Equipment - General requirements - EN 60079-7, Explosive atmospheres - Part 7: Equipment protection by increased safety "e" - ATEX/UKCA certification: Ex ec IIC T4 Gc - ATEX certificate number: 11 ATEX 7928686X - UKCA certificate number: UL22UKEX2512X
IECEx	IECEx Hazardous Location approval, compliant with: - IEC 60079-0, Explosive atmospheres - Part 0: Equipment - General requirements - IEC 60079-7, Explosive atmospheres - Part 7: Equipment protection by increased safety "e" - IECEx certification:  II 3G Ex ec IIC T4 Gc - IECEx certificate number: IECEx UL 15.0032X
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3
Functional Safety	TÜV Certified for Functional Safety ⁽²⁾ . Capable of SIL 2 according to EN 62061, IEC 61508, and EN 61326-3-1

(1) When marked. See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

(2) When used with specified firmware revisions.

1715 Redundant I/O System Accessories

Table 18 - 1715 Module Slot Filler

Cat. No.	Description	Weight, approx, g (oz)
1715-N2S	Short blank slot filler	40 (1.41)
1715-N2T	Tall blank slot filler	50 (1.76)

1715-C2 Expansion Cable

Adapter and module I/O base units can be connected via expansion cables to allow for system space requirements. The entire length of the system, including the backplane and expansion cables, cannot exceed 10 m.

Table 19 - Technical Specifications - 1715 Expansion Cable

Attribute	1715-C2
Supply voltage	50V
Dimensions, approx	2 m
Weight, approx	
Cable assembly:	570 g (20 oz)
Cable plug assembly:	50 g (2 oz)
Cable socket assembly:	50 g (2 oz)
Screw torque	0.5 N•m (0.37 lb•ft)
Screwdriver width	0.4 x 2.0 mm (0.0156 x 0.0781 in.)

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation.

Resource	Description
1715 Redundant I/O System User Manual, publication 1715-UM001	Provides information that is required to install, configure, operate, and maintain the adapter for a redundant I/O system and I/O modules.
System Security Design Guidelines Reference Manual, SECURE-RM001	Provides guidance on how to conduct security assessments, implement Rockwell Automation products in a secure system, harden the control system, manage user access, and dispose of equipment.
Safety Guidelines for the Application, Installation, and Maintenance of Solid-state Control, publication SGI-1.1	Designed to harmonize with NEMA Standards Publication No. ICS 1.1-1987 and provides general guidelines for the application, installation, and maintenance of solid-state control in the form of individual devices or packaged assemblies incorporating solid-state components.
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Product Certifications website, rok.auto/certifications .	Provides declarations of conformity, certificates, and other certification details.

You can view or download publications at [rok.auto/literature](#).

Rockwell Automation Support

Use these resources to access support information.

Technical Support Center	Find help with how-to videos, FAQs, chat, user forums, and product notification updates.	rok.auto/support
Knowledgebase	Access Knowledgebase articles.	rok.auto/knowledgebase
Local Technical Support Phone Numbers	Locate the telephone number for your country.	rok.auto/phonesupport
Literature Library	Find installation instructions, manuals, brochures, and technical data publications.	rok.auto/literature
Product Compatibility and Download Center (PCDC)	Download firmware, associated files (such as AOP, EDS, and DTM), and access product release notes.	rok.auto/pcdc

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.

Allen-Bradley, expanding human possibility, and Rockwell Automation are trademarks of Rockwell Automation, Inc.

EtherNet/IP is a trademark of ODVA, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752, İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com — expanding **human possibility**[®]

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

ASIA PACIFIC: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication 1715-TD001G-EN-P - September 2022

Supersedes Publication 1715-TD001F-EN-P - May 2022

Copyright © 2022 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.